

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 0 949 733 A2

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:
13.10.1999 Bulletin 1999/41

(51) Int. Cl.⁶: H02H 3/093, G01R 21/133

(21) Application number: 99106791.9

(22) Date of filing: 06.04.1999

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: Engel, Joseph Charles
Monroeville, Pennsylvania 15146 (US)

(74) Representative:
Wagner, Karl H., Dipl.-Ing. et al
WAGNER & GEYER
Patentanwälte
Gewürzmühlstrasse 5
80538 München (DE)

(30) Priority: 06.04.1998 US 55559

(71) Applicant: EATON CORPORATION
Cleveland, Ohio 44114-2584 (US)

(54) Accessory network for an electronic trip unit

(57) An electronic trip unit (10) having a two-wire, asynchronous, serial communication accessory network (48) that is connected to a number of unique digital and analog remote slave devices (50, 52, 54 and 56). The address for each slave device is set by its function so that the trip unit (10) does not have to be programmed in the field each time an accessory is added to the system. The network (48) is capable of two-way communication when requested by the electronic trip unit (10). Accessory network communication is control-

led by a first microprocessor (24) within the electronic trip unit (10) or alternatively by a network interface gateway (58). The first microprocessor (24) also controls overcurrent and instantaneous protection functions of the trip unit (10) while a second microprocessor (46) controls voltage based and metering functions. The second microprocessor (46) also has the capability of communicating with a central control network (38).

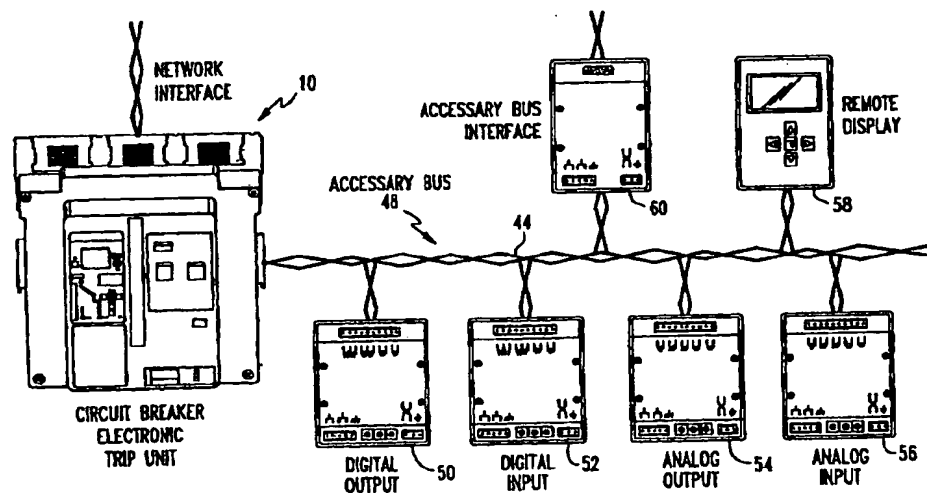


FIG. 2

EP 0 949 733 A2

DescriptionCross References to Related Application

- 5 [0001] This application is related to Patent Application Serial Number _____ (Docket 97-PDC-613) filed concurrently herewith.

Field of the Invention

- 10 [0002] This invention relates in general to electrical switching apparatus, and more particularly to such apparatus that electrically communicate with a plurality of unique accessory devices.

Background Information

- 15 [0003] Circuit breakers are widely used in industrial, commercial and residential applications for protecting electrical conductors and apparatus from damage due to excessive current flow. Initially used as a direct replacement for fuses, circuit breakers have been gradually called upon to provide more sophisticated types of protection other than merely interrupting the circuit when the current flow exceeds a certain level. More elaborate time-current trip characteristics have been developed such that a circuit breaker can rapidly open upon very high current with the time delay being
20 roughly inversely proportional to the degree of overload. Circuit breakers are also available which interrupt upon the detection of ground fault currents. As the complexity of electrical distribution circuits has increased, the control portions of the circuit breaker have been interconnected to provide selected coordination.

- [0004] During the late 1960's, solid state electronic trip units were developed for use in high power, low voltage circuit breakers. These electronic trip units performed functions such as instantaneous and delayed tripping which were tradi-
25 tionally achieved by magnetic and thermal means. The improved accuracy and flexibility of the solid state electronic trip units resulted in their wide spread acceptance.

- [0005] The earliest electronic trip unit designs utilized discreet components such as transistors, resistors and capacitors. More recently, designs such as disclosed in U.S. Patent No. 4,428,022 have included microprocessors which provide improved performance and flexibility. Due to the severe space limitations in low voltage circuit breakers, the
30 assignee of this application has developed a special purpose integrated circuit known as a SuRE Chip™, which incorporates a microcontroller core processor, volatile and nonvolatile memory, and an eight bit analog-to-digital converter, four bit pre-ranging circuit amplifiers, comparators, and an input analog multiplexer which provides all of the essential analog and digital circuit functions in a single monolithic device. This device is described in detail in U.S. Patent No. 5,525,985, issued June 11, 1996.

- 35 [0006] These digital systems sample the current waveforms periodically to generate a digital representation of the current. The microprocessor uses the samples to execute algorithms which implement the protection curve which is typically based upon a constant value of I^2t where "I" is the value of current and "t" is the time-to-trip. Typically in air circuit breakers and vacuum interrupters, the protection curve provides an instantaneous trip, a long delay trip and, if appropriate, a short delay trip function. In some circuit interrupters, the microprocessor also performs calculations for
40 metering such as determining the RMS value of the highest phase current.

- [0007] It is also common today to have a plurality of such circuit interrupters monitored and controlled by a central network control station such as is described in U.S. Patent No. 5,420,799, issued May 30, 1995. In turn, the circuit inter-
45 rupters usually have mechanical status indicating accessory devices mounted within the casings which are used by external and remote monitoring and control equipment. Examples of these are auxiliary contacts which follow the open/close status of the circuit breaker and bell alarm contacts which are closed if the breaker is in the tripped condition. While the central monitoring and control network typically communicates digitally with multiple circuit interrupters over a common network, the connection between the internally mounted mechanical contacts within the individual circuit interrupters and the remote slave devices is accomplished in parallel using two wires per pair of contacts. Usually
50 multiple sets of auxiliary contacts are required and thus multiple pairs of wires are needed. The installation of this wire is costly and time consuming. In addition to digital status information, it is also desirable to provide certain analog information such as the value of load current, bus voltage, power factor, etc. Many remote utilization devices, such as programmable logic controllers, require this information as 4-to-20 ma current values. Typically, circuit breaker trip units don't provide 4-to-20 ma outputs.

- 55 [0008] The increase in related functional versatility that the electronic trip units of circuit breakers have added employing the capabilities of microprocessors has required the processing circuitry to monitor wide ranges in current and related parameters which can vary from open or a zero state, to a normal operating range where most of the metering calculations are performed, to the other extreme or short circuit states which exceed the normal operating range by a factor 10 or greater. Scaling of the monitored value is required to enable the microprocessor to monitor the entire range

below its saturation limitations. The extent of scaling required to accommodate the trip values can affect the accuracy of the calculations performed in the metering range, the normal operating state of the protected device. It can also affect the microprocessor's ability to monitor harmonics and small distortions in the current.

[0009] Accordingly, an improved circuit interrupter is desired that has more flexibility in communicating with its auxiliary slave devices and has increased sensitivity to the monitored current over its normal operating range.

SUMMARY OF THE INVENTION

[0010] An electronic trip unit incorporating this invention communicates with a plurality of unique, remote, accessory devices over a two wire communication bus. The plurality of unique, remote, accessory devices respectively receive information from the electronic trip unit, representative of at least one characteristic or state of the load, and are individually responsive to selective portions of the communication to perform a given function. In the preferred embodiment, the communication bus is an asynchronous, serial, communication network with each accessory device of a given type having a unique address that is defined by its function. This remote accessory bus permits two way communication when requested by the electronic trip unit, which functions as the master. The accessory devices are desirably addressed by their function.

[0011] In another embodiment, the electronic trip unit employs a second digital communication network to communicate with a master controller. Communication with the master controller is managed by a first microprocessor within the electronic trip unit while communication with the accessory network is governed by a second microprocessor within the electronic trip unit. The two microprocessors exchange information as needed while one of the two has responsibility for monitoring the load current within its normal range of operation and performing the metering functions associated with that range and the delayed trip function, while the other microprocessor has responsibility for monitoring the ranges of load current associated with instantaneous trip conditions and processing the corresponding algorithms. In a further embodiment the instantaneous trip microprocessor communicates with the accessory network and the delay trip microprocessor communicates with a central network. Communication through the central control network and the auxiliary network are asynchronous though they each can employ their own distinct protocols.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012] A full understanding of the invention can be gained from the following description of the preferred embodiments when read in conjunction with the accompanying drawings in which:

Figure 1 is a schematic diagram, primarily in block form, illustrating a circuit interrupter configured in accordance with this invention.

Figure 2 is a schematic diagram showing the accessory bus network of this invention;

Figure 3A is a representation of a control message employed by this invention;

Figure 3B is a representation of a data message employed by this invention;

Figure 4 is a graphical representation of examples of modulation that can be employed to establish each bit message represented in Figures 3A and B;

Figure 5 is a graphical illustration of the load current-versus-time-to-trip curve over a range of load currents from a no trip value to an instantaneous trip value; and

Figure 6 is a perspective view of a display and switch input panel which can be used with this invention.

DESCRIPTION OF THE PREFERRED EMBODIMENT

[0013] Figure 1 illustrates an electronic trip unit 10 of the invention in combination with ancillary components used for protection and capture of waveforms in an AC electrical power distribution system 12, which represents the load. The power distribution system 12 illustrated has three phase conductors 14A, B and C, and a neutral conductor 14N. Current transformers 16A, B, C, and N sense current flowing into each of these conductors. Current transformer 16G is a zero sequence transformer which indirectly measures ground current by directly measuring the sum of the phase and neutral currents. These currents are sensed by the conditioning circuits 80 and 82 which prepare the signals for processing by the analog-to-digital (A/D) converters 22 and 84, respectively. Phase-to-neutral voltages are also sensed from the three phase conductors 14A, B and C by the potential transformers 18A, B and C and are inputted to conditioning circuit 82 for processing by the A/D converter 84. The conditioning circuits 80 and 82 scale the current and voltage signals to a suitable range for conversion by the A/D converters 22 and 84 for input to microprocessors 24 and 46, respectively. For example, the microprocessors can be microcomputers.

[0014] The A/D converter 84 samples analog voltages and currents at sampling instances determined by interrupts generated by the microprocessor 46 in a manner more particularly described in U.S. Patent No. 5,600,527, issued Feb-

ruary 4, 1997, and the patents referenced therein. The microprocessor 46 utilizes the data generated by the digital samples to provide voltage based protection functions for example, under/over voltage protection for the electrical system 12, and also uses the samples for waveform capture and harmonic analysis for metering and display purposes.

[0015] The microprocessor 46 communicates with a display and switch input panel 28 more fully illustrated in Figure 6. The panel 28 serves as one means of interface with the user. It is through the panel 28 that the user can control the operation of the circuit breaker 10, and monitor the AC electrical power system 12, including the harmonic content of the waveform and various measured values such as power factor. To this end, the panel 28 has a display 30 on which the harmonic content of the waveforms can be presented to the user. The panel 28 can also be used to input values, e.g., the circuit breaker protection set points.

[0016] In implementing the overcurrent protection functions, the second microprocessor 24 operates in a protection mode to generate a trip signal when any one of the current/time characteristics of a delayed trip protection function is exceeded. This trip signal is passed to a trip mechanism 32 which opens separable contacts 34A, B and C in the three phase conductors 14A, B and C of the electrical system 12. The trip unit 32 is typically a mechanically latched electronically released mechanism. Although typically not provided in the United States, additional separate contacts can be included to also interrupt current in the neutral conductor 14N.

[0017] The microprocessors 24 and 46 can also communicate with one another through a serial peripheral interface (SPI) link 42. This allows, for example, communication between microprocessor 24 and panel 28. The microprocessor 46 can also communicate with a remote processor using the communication link 36 which is an analog transmit and receive circuit known as a transceiver. The transceiver 36 enables the circuit breaker 10 to provide information to and be controlled by a remote processor such as a central control network station 38. A central control network that can be employed for this purpose is described in U.S. Patent No. 5,420,799, issued May 30, 1995. Central control networks of that type typically communicate over a common bus using a digital, asynchronous communication protocol.

[0018] Figure 5 illustrates a plot of the load current value versus time-to-trip from a no trip region to a device that experiences a short period of extremely high load current before entering an instantaneous trip condition. Reference character 76 illustrates the normal operating range. Reference character 78 identifies the broad current range that can be experienced under different trip conditions spanning from long delay to instantaneous. In some cases the current at the point of trip can be a factor of 10 of the normal operating current value. The broad current range makes it very difficult for a single microprocessor such as the microcomputers 24 and 46 shown in Figure 1 to perform all circuit trip and metering functions accurately. The scaling factor that the conditioning circuits 80 and 82 would have to apply to maintain all of the signals that the microprocessor would be exposed to below its saturation state makes it very difficult for the processor to detect subtle changes, e.g., harmonic, in the normal operating range. Figure 1 illustrates a further improvement provided by this invention in splitting the processing functions between two processors 24 and 46. In this way the monitoring, voltage based protection and metering functions and algorithms that need to be processed over the normal operating range of the power circuit 12 can be managed by the processor 46 while the overcurrent trip related functions can be handled by the microprocessor 24. Both processors can then communicate with trip circuit 32. In this way the conditioning circuit 82 need not scale the monitored currents to the coarse range that otherwise would have been required and the microprocessor 46 has more information available to it from the signal to perform its given functions. The conditioning circuits 80 and 82 permit different ranging factors for their respective microprocessors 24 and 46, and enable the respective microprocessors to implement different sampling rates which is sometime beneficial as noted in Patent No. 5,600,527.

[0019] Thus the microprocessor 24 provides the overcurrent protection and communicates with the trip circuit 32 to implement an overcurrent instantaneous trip requirement. The microprocessor 46 also monitors auxiliary contacts 34 on the circuit breaker 11 through a breaker status circuit 26 to indicate the breaker's open/closed condition. The microprocessor 46 also communicates with relay outputs 20 that provide local breaker status information such as high load, ground fault, etc. to a remote location. The microprocessor 24 communicates through a second transceiver 40 to an accessory bus network 48 which will be described hereafter.

[0020] Present day circuit breakers typically have internal contacts or relays which can be wired to a remote location to provide a remote indication of the digital status of the circuit breaker. The status can include an indication of whether the breaker is in an opened, closed, or tripped condition. A pair of wires from the breaker is required for each remote status indication. Remote open or close control of a circuit breaker can also be provided utilizing a pair of wires for each function from a remote location to the circuit breaker. An open command can consist of a voltage on a pair of wires connected to the breakers shunt trip circuit. A close command can consist of a voltage on a pair of wires connected to the breakers motor operator. A pair of wires is required for each remote digital input/output function. The installation of these wires is both costly and time consuming.

[0021] In addition to digital status information, it is also desirable to provide certain analog information such as the value of load current, bus voltage, power factor, etc. Furthermore, most remote utilization equipment such as programmable logic controllers require the information as 4-to-20 ma current signals. Circuit breaker trip units don't typically provide 4-to-20 ma analog outputs.

[0022] This invention replaces parallel pairs of separate wires to the various remote accessory devices associated with a given electronic trip unit 10 with a two wire, asynchronous, serial communication network 48 that is illustrated in Figure 2. The network 48, called an accessory bus, is dedicated to a given protective device such as the electronic trip unit 10. The electronic trip unit 10 will serve as the bus "master" that controls remote "slave" devices which are the various analog and digital input and output accessory units 50, 52, 54, 56, 58 and 60. The information to and from remote accessory units to the master trip unit 10 is carried over a single, rather than multiple, pair of wires 44. Figure 2 shows six representative types of accessory devices, each representative of the type of communication it provides or requires. For example, device 50 is representative of an accessory which provides a digital output; device 52 is representative of a accessory that accepts a digital input; device 54 is representative of a accessory that provides an analog output; device 56 is representative of an accessory that accepts an analog input; remote device 58 is representative of an accessory providing a remote display; and interface 60 is a accessory bus interface for devices such as a personal computer or a communications MODEM. It should be appreciated that one or more of these functions may be required by a single remote device such as a programmable logic controller. One special digital input and output device is a programmable time-delayed close relay which can be used to start a generator following a power outage. The delay would be sent from the electronic trip unit 10 to the relay over the network 48 during normal operation. Should the power fail, the timer within the relay, powered by a "super cap", would start timing. After time out, the timing circuit discharges a capacitor into a magnetically latched relay which transfers the relay to a closed condition. The relay is wired into the generator start circuit which allows the generator to be started to restore power. When power is restored the latched relay is restored to the open condition. The network 48 can also be provided with an interface 60 that can alternately serve as the interface with a personal computer for purposes of inputting, monitoring and storing breaker trip unit 10 setpoints. The interface can also be used to communicate with other networks via a MODEM. Such a MODEM could be a phone connection which initiates a call should a problem exist.

[0023] The address of each slave device can be set by its function, for example, as in Table 1 where "DO" represents digital output devices; "DI" represents digital input devices; where "AO" represents analog output devices; where "AI" represents analog input devices; where "DD" represents digital display devices; and "I" represents a interface to another system.

[TABLE 1]

Type	Address	Hardware	Function
DO	001H	1 or more relay outputs	auxiliary contacts which follow state of circuit breaker
DO	002H	1 or more relay outputs	bell arm contacts which indicate a trip condition
DO	003H	1 or more relay outputs	high load alarm contacts
DO	004H	1 or more relay outputs	ground fault alarm contacts
DO	005H	1 latched relay	time-delayed generator start
DI	007H	2 push button inputs	remote open/close control input
AO	008H	4 to 20 mA output	RMS value of highest phase current scaled 4 mA = 0A and 20 mA = rated current
AI	009H	3 RTD inputs	circuit breaker terminal or switchgear bus temperature
DD	00AH	remote digital display	provides remote means for reading breaker setting, metered values, etc.
I	00BH	RS232/RS485	PC or MODEM interface to electronic trip unit
* H indicates a hexadecimal address			

[0024] Setting the address of each slave device by its function eliminates the need for the electronic trip unit to be programmed for a given application. Alternately the display and switch input 28 can be used to provide such programming. This allows a single slave device such as a digital output unit 50 to be programmed for multiple purposes. Each slave device would need to have means such as switches to allow its address to be set. Also the display and switch input 28 can be used as shown in Figure 6 to program the bus. The display is shown as having three rows with eight alpha/numeric characters per row. The first row is used for column labels such as slave address (ADD), slave relay number (R) and relay function (FN). A digital output slave 50 is identified in row 2 (address 001_H). Its relay 1 (it could have for example 4 relays) is programmed to function as a auxiliary contact (AX). Row 3 illustrates that the same slave

device 50 has its relay 3 programmed to function as a bell alarm (BA). Thus the display and switch input device 28 shown in Figure 6 can be used to set the desired address, I/O number, and I/O function. Once programmed the trip unit 10 will verify that the slave device at a given address is the type specified. If not, the display would blink to annunciate a programming error.

[0025] The microprocessor 24 within the electronic trip unit 10 communicates with accessory bus devices using control messages illustrated in Figure 3A and data messages illustrated in Figure 3B. The communication consists of 33 bit asynchronous messages. The first two bits, bit 0 and bit 1, are start bits which are used to synchronize the receiver. The third bit, bit 2, is a control or data bit. As shown in Figure 3A, this bit is 1 if the message is a control message. If it is, then bit 10 through bit 22 contains the 12-bit slave destination address.

[0026] Bit 3 through bit 6 consist of an instruction field which is used to set the communications hardware. In this accessory bus application, this field will be 0011_B (binary), or 3_H , which enables the addressed slave device to communicate back to the master microprocessor 24. All other slave devices which are not addressed have their communication interface disabled by the message. This establishes a master-slave communications network as a slave can speak only when enabled.

[0027] The command and subcommand fields, bit 7 through bit 9 and bit 23 through bit 26 are used to pass a command request to the slave. As an example, should the slave be a digital output device consisting of four relays the command field could consist of the desired state of the relays while the sub-command could be the complement of the desired state. Thus if a 0 means that a relay should be de-energized and a 1 energized, then a command of 0010_B would mean that relays 4, 3 and 1 should be de-energized while relay 2 is energized. The slave will not respond to this request unless the sub-command field contains the complement of the command field or 1101_B . The command and subcommand field's definitions are thus specific to the slave device function.

[0028] The data message shown in Figure 3B is typically used to send data to/from a slave device. Bit 3 through bit 26 form a 24-bit data field. Should the slave be an analog input/output device consisting of two 4-to-20 mA inputs and two 4-to-20 mA outputs the communication message protocol master-to-slave could be as follows. First the master microprocessor 24 would send an instruction of 3_H to the slave and a command and subcommand which would instruct the slave to send the value of its two analog inputs and be prepared to accept the desired value of two analog outputs. The 24 bit data field would be considered to consist of two 12 bit fields where bit 3 through bit 14 represent analog value 1 and bit 15 through bit 26 represent analog value 2. The scaling would be such that the maximum value could be $20MA = FFF_H$ or 4095_D , while the minimum value would be $4MA = 333_H$ or 819_D . A value less than 333_H such as zero indicates that the analog value is invalid or not used.

[0029] The Analog Input Module 54 shown in Figure 2 can be used, for example, to measure bus bar temperature with the switchgear near the breaker terminal connection. Such a temperature measurement could be made by means of a resistance temperature detector (RTD). The voltage output of the RTD would be an input to Analog Input Module 54. The Circuit Breaker Electronic Trip Unit 10 can then read this value, display it on the Display and Switch Input 28, and trip the breaker if the temperature reading is too high. A high reading can occur if the breaker's contacts are worn or damaged. A poor contact can have a high resistance which will make the breaker's terminal run too hot, even if the current is below the full load rated value.

[0030] The Digital Input module 52 shown in Figure 2 can be used to provide a remote open/close control station. For safety it is desirable to be able to close a breaker without standing directly in front of the unit. Two normally opened switches feeding a Digital Input module 52 can be used for this purpose. One normally opened switch would be labeled OPEN while the other would be labeled CLOSE. The Circuit Breaker Electronic Trip Unit 10 could read these two switches such that if one and only one switch is closed the breaker would perform the requested action. If both are opened or closed no action would be taken. Such a request would be confirmed by multiple reads to avoid false action.

[0031] The Remote Display 58 shown in Figure 2 could be used to display Circuit Breaker Electronic Trip Unit 10 analog and digital information such as is normally displayed at the trip unit on the Display and Switch Panel 28.

[0032] The Accessory Bus Interface 60 shown in Figure 2 has a number of uses. When connected to a personal computer (PC) it can be used as a means for programming the trip unit 10. The PC would have the ability to establish the desired setpoints by means of its display and then on command download the settings from the PC to the Accessory Bus Interface 60. The values would be saved in a non-volatile memory such that the values are preserved during a power outage. The Circuit Breaker Electronic Trip Unit 10 would be able to upload these values on command from the PC. Should a trip unit setting be changed using the Display and Switch Panel 28 the new values would be saved within the trip unit 10 and also downloaded to the Accessory Bus Interface 60. In this way the Accessory Bus Interface 60 will always hold the latest setpoint values. Should the trip unit 10 be changed it will be possible to upload the old values into the trip unit from the Accessory Bus Interface 60. The Accessory Bus Interface 60 can also be used as a communications MODEM connection such as a phone connection. This would allow the trip unit 10 to initiate a phone call should a circuit problem be detected.

[0033] Figure 4 illustrates a number of modulation examples that can be used to carry information on the asynchronous, serial communication accessory network. Waveform 62 is known as "non return to 0" modulation format "NRZ";

waveform 64 is known as "return to 0" modulation format "RTZ"; waveform 66 is known as "return to complement" modulation format "RTC"; waveform 68 is known as "amplitude shift keying" modulation format "ASK"; waveform 70 is known as "frequency shift keying" modulation format "FSK"; waveform 72 is known as "phase shift keying" modulation format "PSK." A BIT length is illustrated in Figure 4 by reference character 74.

[0034] It should be appreciated that the foregoing protocols are exemplary and others may be employed without detracting from the invention. In addition the accessory bus 48 and the central controller 38 can employ completely different and distinct protocols.

[0035] Thus, in accordance with the preferred embodiment described heretofore, the microprocessor 24 performs the overcurrent protection, monitors the breaker status, trips the breaker during overload and fault conditions, and communicates with the microprocessor 46 through a serial peripheral interface (SPI) link 42 and serves as the master for the accessory bus 48. The microprocessor 46 provides metering and voltage based protective relay protection controls output relays, human interfacing by way of display and switch input panel 28, trip implementation under voltage based fault conditions or upon a request from the central controller 37, communication with the microprocessor 24 through the serial peripheral interface (SPI) link 42, and remote communication with the central controller 37 which serves as a master to the circuit interrupter 11. Either microprocessor 24 or 46 can trip the breaker should the information shared over the synchronous serial port 42 indicate that either or both microprocessors detect a problem. Thus, this invention provides a number of improvements enabling a layering of networks and improved communication and digital processing capability.

[0036] While specific embodiments of the invention have been described in detail, it will be appreciated by those skilled in the art, that various modifications and alternatives to those details could be developed in light of the overall teachings of the disclosure. Accordingly, the particular arrangements disclosed are meant to be illustrative only, and not limiting as to the scope of invention which is to be given the full breadth of the claims appended and any and all equivalence thereof.

Claims

1. An electronic trip unit (10) which is operative under predetermined conditions to initiate a signal to open a load current circuit and interrupt current to the load, including:
 - an electrical output port on the electronic trip unit (10) for conveying a signal representative of at least one characteristic of the load current circuit;
 - a two wire communication bus (48) in communication with the output port; and
 - a plurality of unique, remote, slave devices (50,52,54,56 and 58) that respectively receive information from the output port over the communication bus and are individually responsive thereto to perform a given function.
2. The electronic trip unit (10) of claim 1 wherein at least two of the slave devices (50 and 52) are addressed individually by the signal conveyed by the output port, and are responsive to the signal to provide different functions.
3. The electronic trip unit (10) of claim 2, including a microprocessor (24), which controls communication through the output port to the slave devices (50,52,54,56 and 58).
4. The electronic trip unit (10) of claim 3 wherein the bus (48) carries two-way communication and where at least some of the slave devices communicate with the microprocessor (24) in response to a corresponding request from the microprocessor (24).
5. The electronic trip unit (10) of 2 wherein each of the slave devices (50, or 52, or 54, or 56 or 58) that perform the same function have the same unique address, which differs from the slave devices that perform different functions.
6. The electronic trip unit (10) of claim 1 wherein the bus (48) carries both analog and digital signals wherein at least one of the slave devices (56) receives an analog input and at least a second of the slave devices (52) receives a digital input.
7. The electronic trip unit (10) of claim 1 wherein the bus (48) forms an asynchronous, serial communication network.
8. The electronic trip unit (10) of claim 3 wherein the microprocessor (24) receives instructions from a master controller (38) and processes those instructions to control the slave devices.
9. The electronic trip unit (10) of claim 8 wherein the microprocessor (24) can at times control functions of the master

controller (38) in response to information received from the slave devices (50,52,54,56 and 58).

10. The electronic trip unit (10) of claim 1 including a first and second microprocessor (46 and 24) wherein the first microprocessor (46) performs voltage based protection and metering functions of the trip unit and the second microprocessor (24) controls communication through the output port to the slave devices (50,52,54,56 and 58) and performs overcurrent and instantaneous protection functions of the trip unit.

11. The electronic trip unit (10) of claim 10 wherein the first microprocessor (46) communicates with a network controller (38).

12. The electronic trip unit (10) of claim 11 wherein the network controller (38) communicates with the first microprocessor (46) through an asynchronous communication link.

13. A method of communicating between an electronic trip unit (10) and a plurality of accessory devices (50,52,54,56 and 58) comprising the steps of:

connecting the electronic trip unit (10) and the accessory devices (50,52,54,56 and 58) to a two wire common network (48); and
communicating between the electronic trip unit (10) and the accessory devices (50,52,54,56,58 and 60) over the common network (48) where each of the accessory devices assigned a different function is addressed uniquely.

14. The method of claim 13 including the step of addressing the accessory devices (50,52,54,56,58 and 60) by their function.

15. The method of claim 13 including the step of communicating both analog and digital information over the network (48).

16. The method of claim 13 including the step of communicating in both directions between the accessory devices (50,52,54,56,58 and 60) and the electronic trip unit (10).

17. The method of claim 13 including the step of communicating across the network (48) using an asynchronous communication protocol.

18. The method of claim 17 including the step of controlling the electronic trip unit (10) using a central controller (38) that communicates with the electronic trip unit (10) over a separate distinct network using an asynchronous communication protocol that is distinct from the protocol used to communicate with the accessory devices (50,52,54,56,58 and 60).

19. The method of claim 18 including the steps of:

managing communication with the central controller (38), within the electronic trip unit (10), using a first microprocessor (46); and
controlling communication with the accessory devices (50,52,54,56,58 and 60) through the common network (48) using a second microprocessor (24) within the electronic trip unit (10).

20. The method of claim 19 including the steps of:

performing metering and voltage based protection functions of the electronic trip unit with said first microprocessor (46); and
performing an instantaneous trip function of the electronic trip unit with said second microprocessor (24).

21. The method of claim 20 wherein the first and second microprocessors (46 and 24) monitor current in a load including the step of scaling the current to each microprocessor to a different value corresponding to a range of values monitored by said first and second microprocessors (46 and 24), respectively, which is established by the protection functions performed respectively by each said first and second microprocessors.

22. The method of claim 20 including the step of performing an overcurrent trip function of the electronic trip unit (10)

with said second microprocessor (24).

5

10

15

20

25

30

35

40

45

50

55

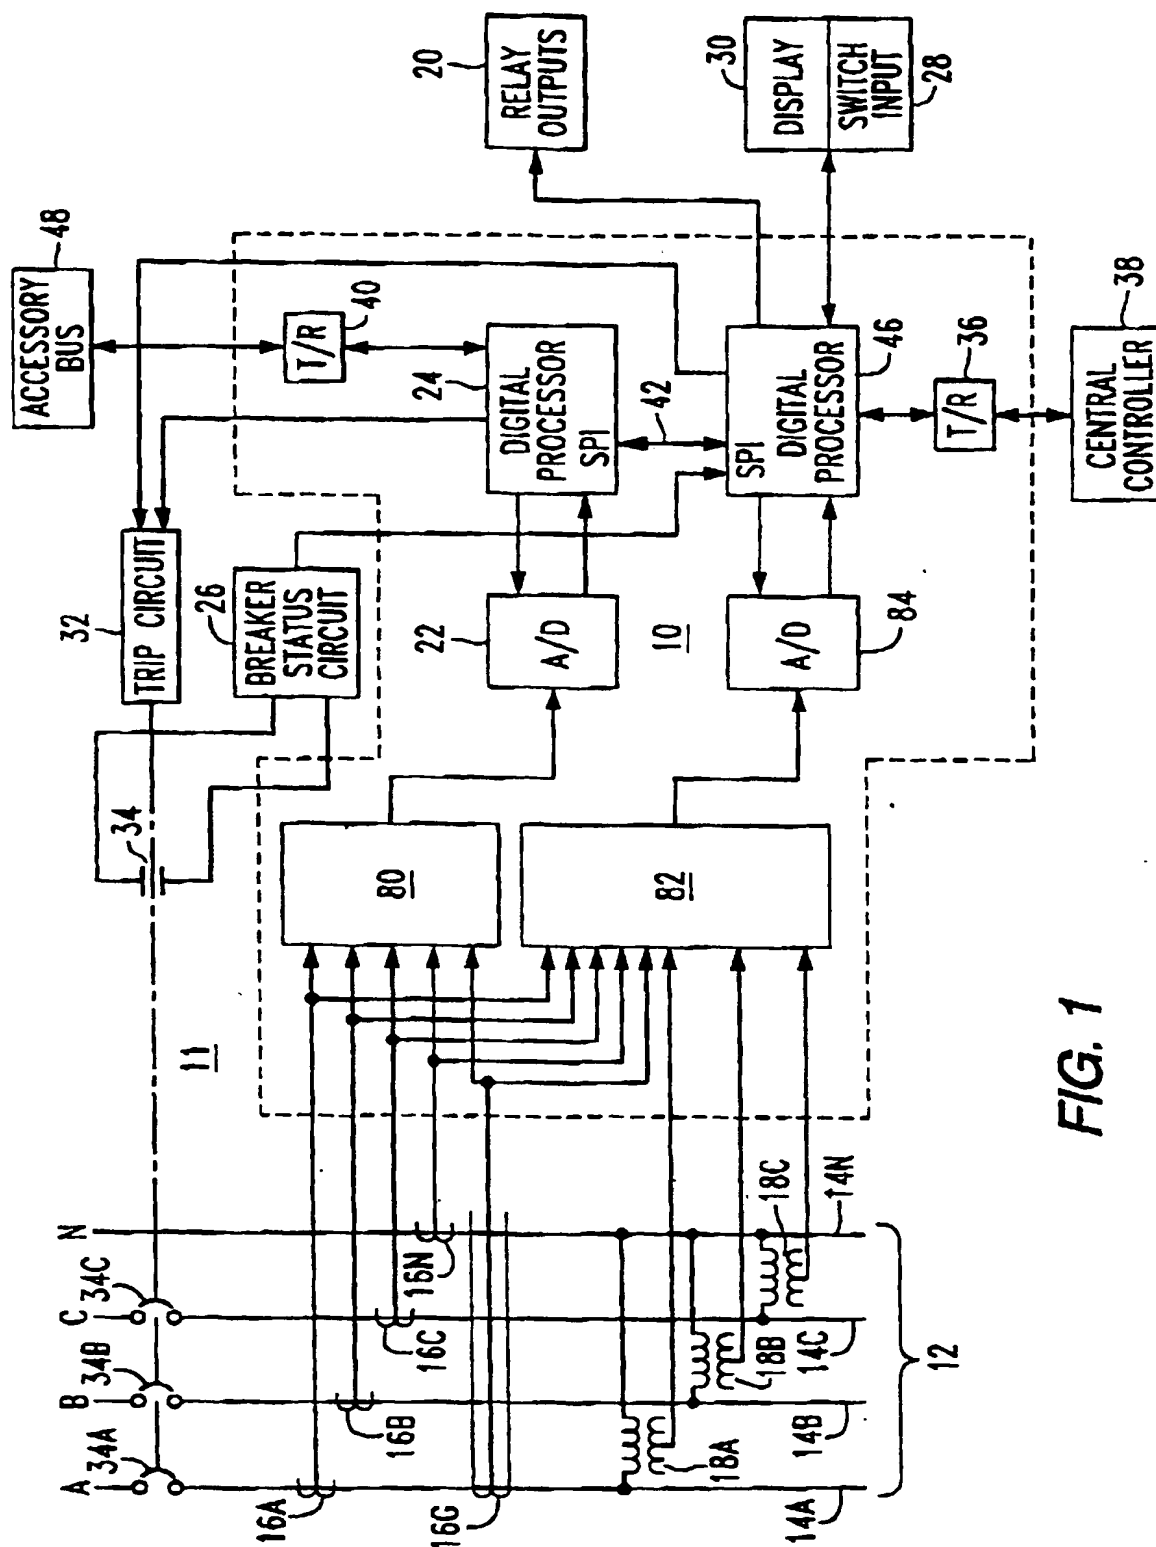


FIG. 1

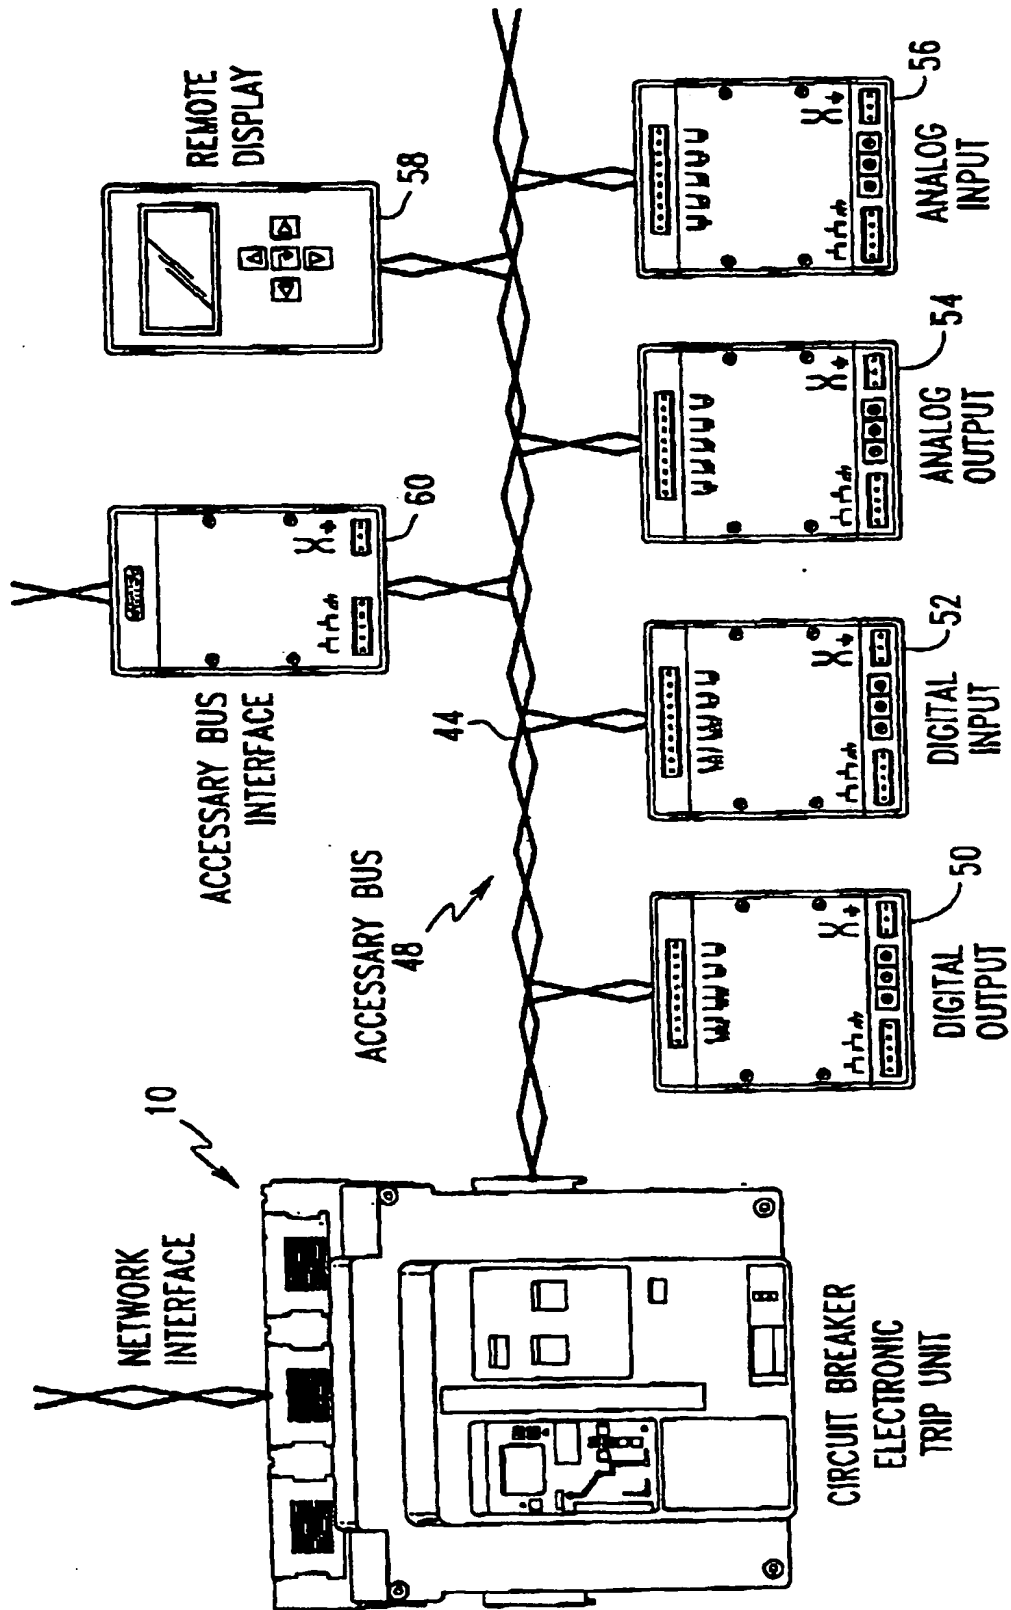


FIG. 2

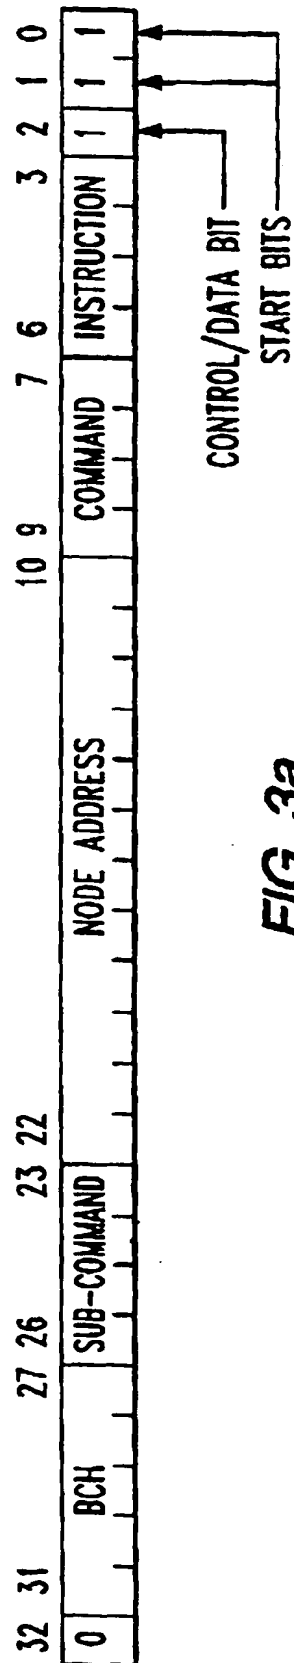


FIG. 3a

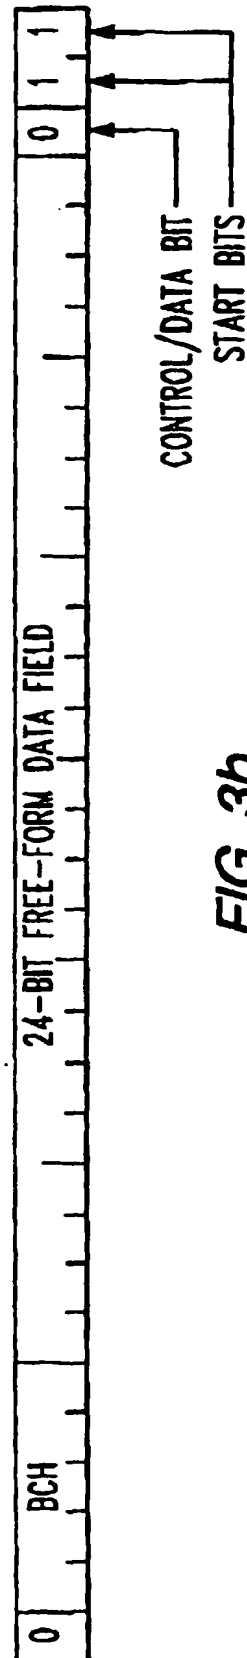


FIG. 3b

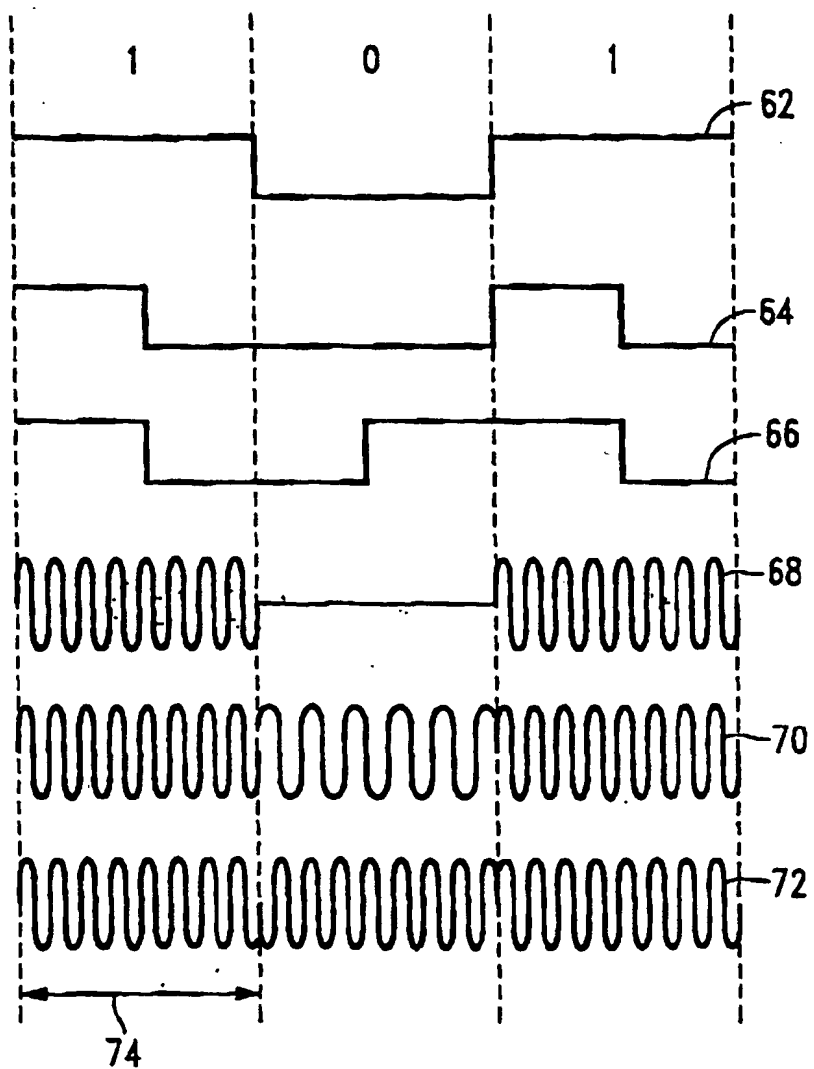


FIG. 4

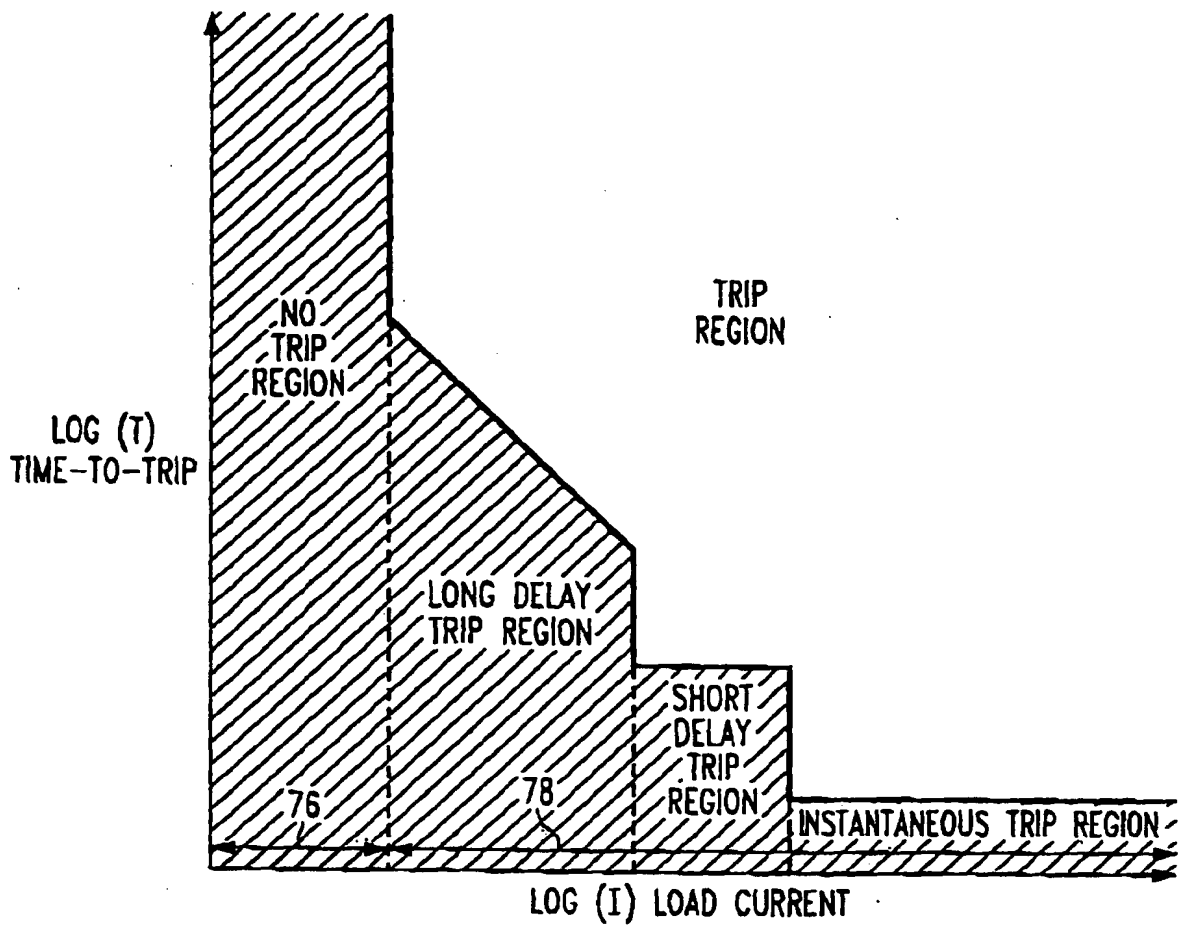


FIG. 5


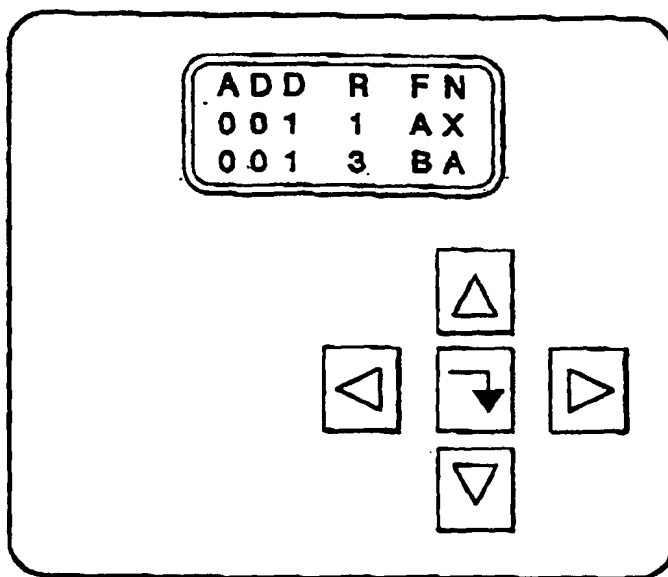


FIG. 6



(19)

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 949 733 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
04.04.2001 Bulletin 2001/14

(51) Int. Cl.⁷: H02H 3/093, H02H 3/05,
G01R 21/133

(43) Date of publication A2:
13.10.1999 Bulletin 1999/41

(21) Application number: 99106791.9

(22) Date of filing: 06.04.1999

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: 06.04.1998 US 55559

(71) Applicant: EATON CORPORATION
Cleveland, Ohio 44114-2584 (US)

(72) Inventor: Engel, Joseph Charles
Monroeville, Pennsylvania 15146 (US)

(74) Representative:
Wagner, Karl H., Dipl.-Ing. et al
WAGNER & GEYER
Patentanwälte
Gewürzmühlstrasse 5
80538 München (DE)

(54) Accessory network for an electronic trip unit

(57) An electronic trip unit (10) having a two-wire, asynchronous, serial communication accessory network (48) that is connected to a number of unique digital and analog remote slave devices (50,52,54 and 56). The address for each slave device is set by its function so that the trip unit (10) does not have to be programmed in the field each time an accessory is added to the system. The network (48) is capable of two-way communication when requested by the electronic trip unit (10). Accessory network communication is control-

led by a first microprocessor (24) within the electronic trip unit (10) or alternatively by a network interface gateway (58). The first microprocessor (24) also controls overcurrent and instantaneous protection functions of the trip unit (10) while a second microprocessor (46) controls voltage based and metering functions. The second microprocessor (46) also has the capability of communicating with a central control network (38).

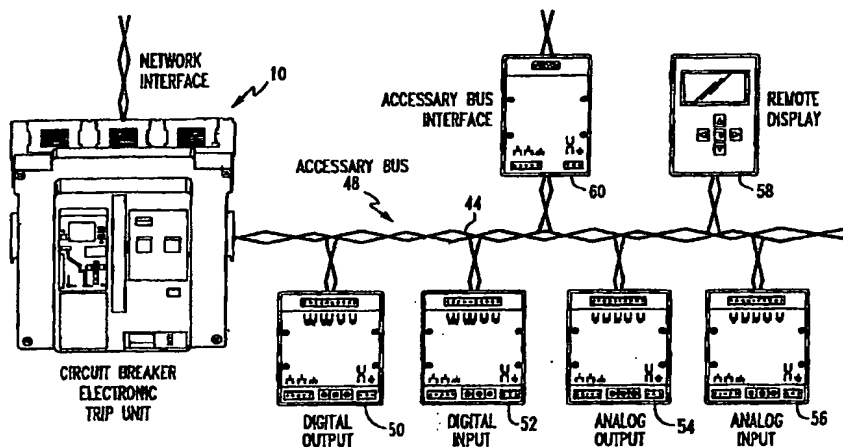


FIG. 2

EP 0 949 733 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 99 10 6791

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
X	US 4 972 290 A (SUN SHAN C ET AL) 20 November 1990 (1990-11-20) * column 3, line 45 - column 5, line 25; figure 1 *	1-4,7-9, 13,14, 16-18	H02H3/093 H02H3/05 G01R21/133
D,X	US 5 420 799 A (PETERSON CLYDE O ET AL) 30 May 1995 (1995-05-30) * column 8, line 31 - line 46; figure 12 * * column 9, line 45 - column 10, line 45; figure 16 *	1-4,7-9, 13,14,16	
A	US 5 369 356 A (KINNEY MICHAEL A ET AL) 29 November 1994 (1994-11-29) * column 4, line 35 - column 5, line 47; figures 1A,2 * * column 8, line 36 - column 10, line 32 *	10,19	
			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
			H02H G01R
The present search report has been drawn up for all claims			
Place of search BERLIN		Date of completion of the search 6 February 2001	Examiner Hijazi, A
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			

EPO FORM 1503 03.82 (P04021)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 10 6791

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

06-02-2001

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4972290 A	20-11-1990	CA 2024683 A	30-03-1991
		KR 176245 B	15-05-1999
US 5420799 A	30-05-1995	US 5384712 A	24-01-1995
		AU 662542 B	07-09-1995
		AU 2079192 A	18-02-1993
		CA 2076211 A	16-02-1993
		DE 69227957 D	04-02-1999
		DE 69227957 T	05-08-1999
		EP 0528634 A	24-02-1993
		ES 2127204 T	16-04-1999
		JP 5232143 A	07-09-1993
		US 5315531 A	24-05-1994
		US 5289191 A	22-02-1994
US 5369356 A	29-11-1994	US 5498956 A	12-03-1996

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82